



CAMERA SOLUTIONS

*H.265/H.264 Encoder
OEM Kits*





EXPAND YOUR REACH

Z3's Camera Solutions bring you the latest video compression technology to solve the dilemma of high quality video requiring too much bandwidth. Never before has integrating H.265 video in resolutions up to 4K been so simple and cost-effective.

Our camera solutions provide the highest quality image at the lowest bandwidth, latency and power. These robust systems bring together video encoding, integrated remote camera configuration and control, while supporting multiple input formats including LVDS, Composite, SDI and HDMI.

Video with this clarity is a perfect fit for UGV, UAV, inspection, remote monitoring, security and surveillance, video conferencing and more. Upgrade to H.265 and expand your reach with Z3's Camera Solutions.



H.265 H.264

H.265/H.264 Encoded Video

Choose to output highly efficient H.265 compressed video or industry standard H.264 video.



Display Features

Resize your video into lower resolutions while maintaining full field of view. View multiple cameras with PIP display.



ONVIF Profile S Compliant

ONVIF® Profile S adds additional remote camera control options and easy integration into existing surveillance infrastructures.



Remote Camera Control

Our Camera Solutions feature remote control via VMS, webserver, SSH or API. PTZ via RS-485 and integrated control/configuration support for cameras including Sony VISCA®, DRS, FLIR® and others over the IP network.

HE4K-DCK-1x

Compact 4K Camera Dock

- Natively integrates with FCB-ER8300/8530/8550 Sony 4K Block Cameras
- Pass VISCA™ Camera Control Commands over IP
- Integrates with ultra low-light Sony UMC-S3CA camera via Micro HDMI Input
- Low Bandwidth, Low Latency Video Encoding
- Simultaneous encode of H.265 and H.264



Technical

Interfaces	Video from Sony 4K block cameras via KEL ribbon cable ¹ , GigE, USB 2.0, Audio Input, RS-232, RS-485, Composite Output, Micro HDMI Input
Video Codecs	H.265, H.264 and MJPEG
Encoding Resolutions	4K UHD & HD up to 30 fps (2160p, 1080p, 720p & lower)
Output Formats	RTP, RTSP, MPEG-2 TS, RTMP and TS File
Features	<ul style="list-style-type: none">• Ability to Resize 3840x2160 Camera Input to Lower Resolutions Keeping Full Field of View• Pass VISCA™ Camera Control Commands over IP and PoE• Easy-to-Use HTTP/HTTPS web server• ONVIF® Profile S• Simultaneous Stream and Record to SD Card or USB• PoE• Optional Chassis for Camera and Encoder Board• Compatible with HE265-DEC decoder

Specifications

Encoder Board Size	58 x 58 x 13mm (2.28 x 2.28 x 0.51in)
Weight	87.9 g (3.10 oz)
Temperature	-5°C to 70°C ⁺
Power Consumption	4.5W typical (not including camera)

Ordering Options

HE4K-DCK-1x
OEM Production Set
HE4K-DCK-1x Encoder Boards and Documentation

HE4K-DCK-RPS
OEM Starter Kit
HE4K-DCK-1x Encoder Boards, KEL Ribbon Cable, Power Supply, Software SDK and Documentation

¹KEL ribbon cable sold separately

⁺Assumes proper thermal design is implemented to dissipate heat adequately to support the temperature rating

HE2K-DCK-1x

Compact HD Camera Dock

- Natively integrates with FCB-EV7520(A) Sony Block Cameras
- Pass VISCA™ Camera Control Commands over IP
- High Quality Efficient H.265 Video Encoding
- Low Bandwidth, Low Latency Video Encoding
- Simultaneous encode of H.265 and H.264



Technical

Interfaces

Video from Sony FCB-EV7520(A) block camera via KEL ribbon cable¹, GigE, USB 2.0, Audio Input, RS-232, RS-485, Micro-HDMI Passthrough, Composite Output

Video Codecs

H.265, H.264 and MJPEG

Encoding Resolutions

60, 59.94, 50, 30, 29.97, 25 @1080p and 720p

Output Formats

RTP, RTSP, MPEG-2 TS, RTMP and TS File

Features

- Low Latency, Low Power
- Ability to Resize 1920x1080 Camera Input to Lower Resolutions Keeping Full Field of View
- Pass VISCA™ Camera Control Commands over IP
- Easy-to-Use HTTP/HTTPS web server
- ONVIF® Profile S
- Simultaneous Stream and Record
- PoE
- Optional Chassis for Camera and Encoder Board
- Compatible with ZEUS® decoders

Specifications

Encoder Board Size

58 x 58 x 13mm (2.28 x 2.28 x 0.51in)

Weight

93 g (3.28 oz)

Temperature

-5°C to 70°C*

Power Consumption

4.5W typical (not including camera)

Ordering Options

HE2K-DCK-1x

OEM Production Set

HE2K-DCK-1x Encoder Boards and Documentation

HE2K-DCK-RPS

OEM Starter Kit

HE2K-DCK-1x Encoder Boards, KEL Ribbon Cable, Power Supply, Software SDK and Documentation

¹KEL ribbon cable sold separately

*Assumes proper thermal design is implemented to dissipate heat adequately to support the temperature rating

FV4K-DCK-1x

Dual Camera 4K Video Encoder

- H.265/H.264 Dual Camera Video Streaming
- Interfaces with Sony 4K Block and Thermal Cameras
- High Quality Low Latency Encoding Pass Camera Control Commands over IP



Technical

Interfaces

Visible Camera Formats Sony FCB-ER8300/8530/8550 via KEL ribbon cable¹ and Micro HDMI

Thermal Camera Formats FLIR® Tau®2 (digital), DRS Tamarisk (digital), LVDS, Composite

Recording USB or Micro SD

Additional Interfaces GigE, Audio Input, RS-485, Composite Output, Serial

Video Codecs H.265, H.264 and MJPEG

Encoding Resolutions 4Kp30, 1080p (up to 60fps), 720p, NTSC/PAL, VGA, CIF and QVGA

Output Formats RTP, RTSP, MPEG-2 TS, RTMP and TS File

Features

- Low Latency, Low Power
- Ability to Resize 4Kp30 Input
- Output two independent encoded streams or Picture-in-Picture stream
- Pass Camera Control Commands over IP
- PoE
- Easy-to-Use HTTP/HTTPS web server
- ONVIF® Profile S
- Compatible with HE265-DEC and other ZEUS® decoders

Specifications

Encoder Board Size 58 x 58 x 13mm (2.28 x 2.28 x 0.51in)

Weight 92 g (3.25 oz)

Temperature -5°C to 70°C⁺

Power Consumption 4.5W typical (not including camera)

Ordering Options

FV4K-DCK-1x

OEM Production Set

FV4K-DCK-1x Encoder Boards and Documentation

FV4K-DCK-RPS

OEM Starter Kit

FV4K-DCK-1x Encoder Boards, KEL Ribbon Cable, Power Supply, Software SDK, Serial Cable and Documentation

¹KEL ribbon cable sold separately

⁺Assumes proper thermal design is implemented to dissipate heat adequately to support the temperature rating

FV2K-DCK-1x

Dual Camera Full HD Video Encoder

- H.265/H.264 Dual Camera Video Streaming
- Interfaces with Sony FCB-EV7520(A) and Thermal Cameras
- Supports Two HD Visible Cameras or HD Visible and Thermal Camera Combination
- High Quality Low Latency Encoding
- Pass Camera Control Commands over IP



Technical

Interfaces

Visible Camera Formats Sony FCB-EV7520(A) via KEL ribbon cable¹, LVDS, Composite

Thermal Camera Formats FLIR® Tau®2 (digital), DRS Tamarisk (digital), LVDS, Composite

Recording USB or Micro SD

Additional Interfaces GigE, Audio Input, RS-485, Micro-HDMI Output, Composite Output, Serial

Video Codecs H.265, H.264 and MJPEG

Encoding Resolutions 1080p (up to 60fps), 720p, NTSC/PAL, VGA, CIF and QVGA

Output Formats RTP, RTSP, MPEG-2 TS, RTMP and TS File

Features

- Low Latency, Low Power
- Ability to Resize HD Camera Input
- Output two independent encoded streams or Picture-in-Picture stream
- Pass Camera Control Commands over IP
- PoE
- Easy-to-Use HTTP/HTTPS web server
- ONVIF® Profile S
- Compatible with ZEUS® decoders

Specifications

Encoder Board Size 58 x 58 x 13mm (2.28 x 2.28 x 0.51in)

Weight 89 g (3.14 oz)

Temperature -5°C to 70°C⁺

Power Consumption 4.5W typical (not including camera)

Ordering Options

FV2K-DCK-1x
OEM Production Set
FV2K-DCK-1x Encoder Boards and Documentation

FV2K-DCK-RPS
OEM Starter Kit
FV2K-DCK-1x Encoder Boards, KEL Ribbon Cable, Power Supply, Software SDK and Documentation

¹KEL ribbon cable sold separately

⁺Assumes proper thermal design is implemented to dissipate heat adequately to support the temperature rating

FSDI-DCK-1x

Full HD Dual Camera SDI Encoder

- H.265/H.264 Dual Camera Video Streaming
- Interfaces with Sony EV7520(A), SDI and Thermal Cameras
- Supports Two Visible/Thermal Cameras or HD Visible and Thermal Camera Combination
- High Quality Low Latency Encoding Pass Camera Control Commands over IP



Technical

Interfaces

Visible Camera Formats 3G-SDI, Sony FCB-EV7520(A) via KEL ribbon cable¹, LVDS, Composite (x2)

Thermal Camera Formats FLIR® Tau®2 (digital), DRS Tamarisk (digital), LVDS, Composite

Recording USB or Micro SD

Additional Interfaces GigE, Audio Input, RS-485, Composite Output, 3G-SDI Passthrough, Serial

Video Codecs H.265, H.264 and MJPEG

Encoding Resolutions 1080p (up to 60fps), 1080i, 720p, NTSC/PAL, VGA, CIF and QVGA

Output Formats RTP, RTSP, MPEG-2 TS and RTMP

Features

- Low Latency, Low Power
- SDI camera input with simultaneous stream and real-time passthrough of SDI output
- Output two independent encoded streams or Picture-in-Picture stream
- Pass Camera Control Commands over IP
- PoE
- Easy-to-Use HTTP/HTTPS web server
- ONVIF® Profile S
- Compatible with ZEUS® decoders

Specifications

Encoder Board Size 58 x 58 x 13mm (2.28 x 2.28 x 0.51in)

Weight 87.9 g (3.10 oz)

Temperature -5°C to 70°C⁺

Power Consumption 4.5W typical (not including camera)

Ordering Options

FSDI-DCK-1x

OEM Production Set

FSDI-DCK-1x Encoder Boards and Documentation

FSDI-DCK-1x-RPS

OEM Starter Kit

FSDI-DCK-1x Encoder Boards, Power Supply, Software SDK, Documentation, Serial Cable, MMCX to BNC Cable

¹KEL ribbon cable sold separately

⁺Assumes proper thermal design is implemented to dissipate heat adequately to support the temperature rating

CIB-FT2-02

FLIR® Tau®2 Digital LVDS Output Board

- Attaches to the FLIR® Tau2® Camera Body
- LVDS Digital Video Output
- NTSC/PAL Analog Video Output
- Direct Connection to Z3 Technology's FV2K, FV4K, FSDI Dual Camera Encoder Family



Technical

Camera Supported	FLIR® Tau®2
Video Output	<ul style="list-style-type: none">• LVDS Digital• NTSC/PAL Analog
Interfaces	<ul style="list-style-type: none">• FlexIO™ connector with video, power and serial control• MCX jack with composite video output• USB 2.0 for Power and configuration
Output Formats	<ul style="list-style-type: none">• LVDS and analog NTSC/PAL via 30pin FlexIO™• Analog NTSC/PAL Video via MCX
Features	<ul style="list-style-type: none">• Attaches directly to the FLIR® Tau®2 camera• Digital LVDS and Composite Video Output• FlexIO™ connector with power, video and control for direct connection to Z3's FV2K, FV4K, FSDI dual camera encoders

Specifications

Encoder Board Size	38 x 38 mm (1.50 x 1.50 in)
Weight	8 g (0.28 oz)

Ordering Options


CIB-FT2-02

Camera interface board for the FLIR® Tau®2¹

¹FLIR® Tau®2 sold separately

USE CASE

The diagram below demonstrates an example of our cameras in action. Video is being supplied by the Sony FCB-ER8300 4K visible camera and a FLIR® Tau®2 Camera connected to our CIB-FT2-02 Interface board. The FV4K-DCK-1x is encoding the video and sending it over IP to be decoded and displayed on a TV.

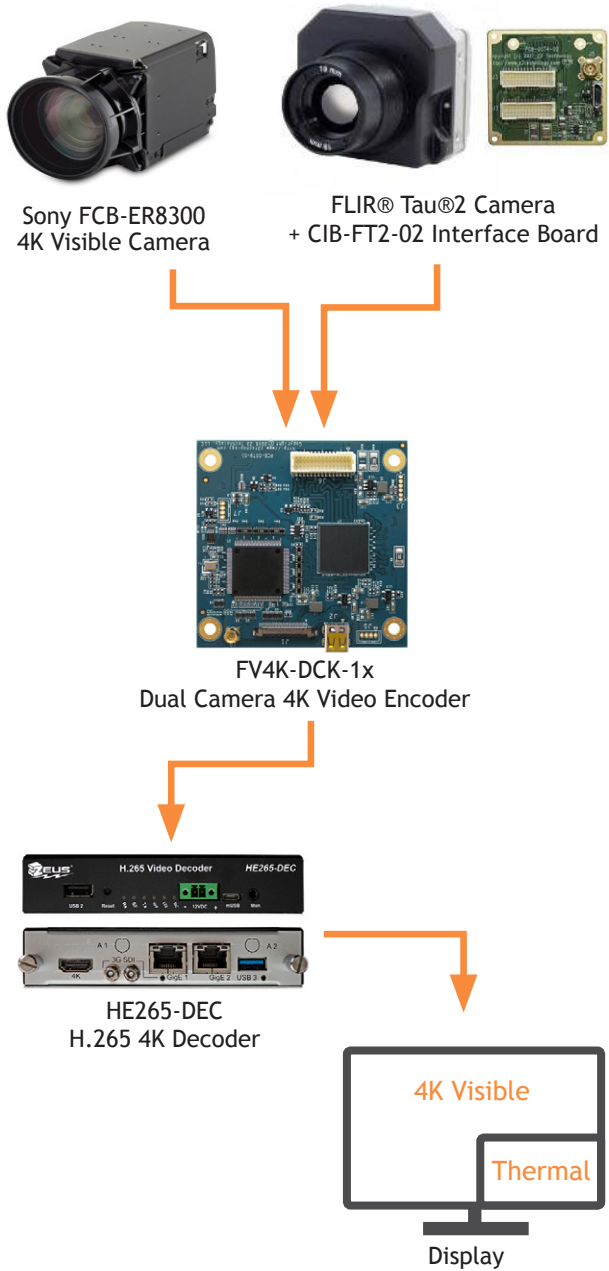

CAMERA SOLUTIONS MATRIX

	HE4K-DCK-1x	HE2K-DCK-1x	FV2K-DCK-1x	FV4K-DCK-1x	FSDI-DCK-1x
	Compact 4K Camera Dock	Compact HD Camera Dock	Dual Camera HD Encoder	Dual Camera Full 4K Encoder	Dual Camera SDI Encoder
Sony EV7520(A)		1	2		1
Sony ER8300/85xx	1			1	
Analog NTSC/PAL			Yes	Yes	Yes
FLIR Tau 2 Analog			Yes	Yes	Yes
FLIR Tau 2 Digital			Yes with additional interface board option	Yes with additional interface board option	Yes with additional interface board option
DRS Tamerisk Digital			Yes	Yes	Yes
Thermal Analog Video			Yes	Yes	Yes
Thermal Digital Video			Yes, multiple formats supported with additional interface board option	Yes, multiple formats supported with additional interface board option	Yes, multiple formats supported with additional interface board option
HDMI Input	1			1	
3G-SDI Input					Yes
SDI Loop Out					Yes
HDMI Output		Yes	Yes		

DISTRIBUTORS

Aegis Electronic Group, Inc. **USA**

Phone: +1.760.729.2026
Website: www.aegiselect.com

Phase1 Technology **USA**

Phone: +1.631.254.2600
Website: www.phase1vision.com

Elvitec **France**

Phone: +33.(0)49.009.2580
Website: www.elvitec.fr

Ulkem **Turkey**

Phone: +90.312.425.04.41
Website: www.ulkem.com.tr

Tecnosens S.P.A. **Italy, Spain and Portugal**

Phone: +39.030.353.41.44
Website: www.tecnosens.com

VideoSet **Israel**

Phone: +972.54.2424240
Website: www.videoset.com

ABOUT Z3

Z³ Technology is an industry-leading, USA-based manufacturer of production-ready embedded multimedia solutions and IP camera systems. From our founders to our world-class engineers to our sales and customer service team, we understand your requirements and speak your language. Our experience allows us to provide cost-effective solutions to meet your product requirements. With the assistance of our robust worldwide distribution and sales networks, we can provide a simple solution for your multimedia needs.



Contact Us:

sales@Z3technology.com
+1.402.323.0702

Copyright 2018. Z³ Technology, LLC.

All content subject to change without notice. All product and company names are trademarks™ or registered® trademarks of their respective holders.

DOC-MKT-0103-04