



Head Office

9B Smolnaya St, Kiev, Ukraine, 03680

Tel.: +380 50 361 17 08



E-mail: uav@skyeton.com

www.skyeton.com

Business hours: Mon – Fri, 09:00 – 18:00, UTC+2


Copyright© 2006-2019 «Skyeton». All right reserved.

Issued March 2019

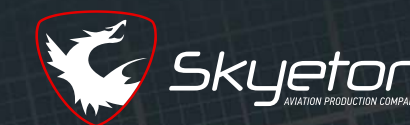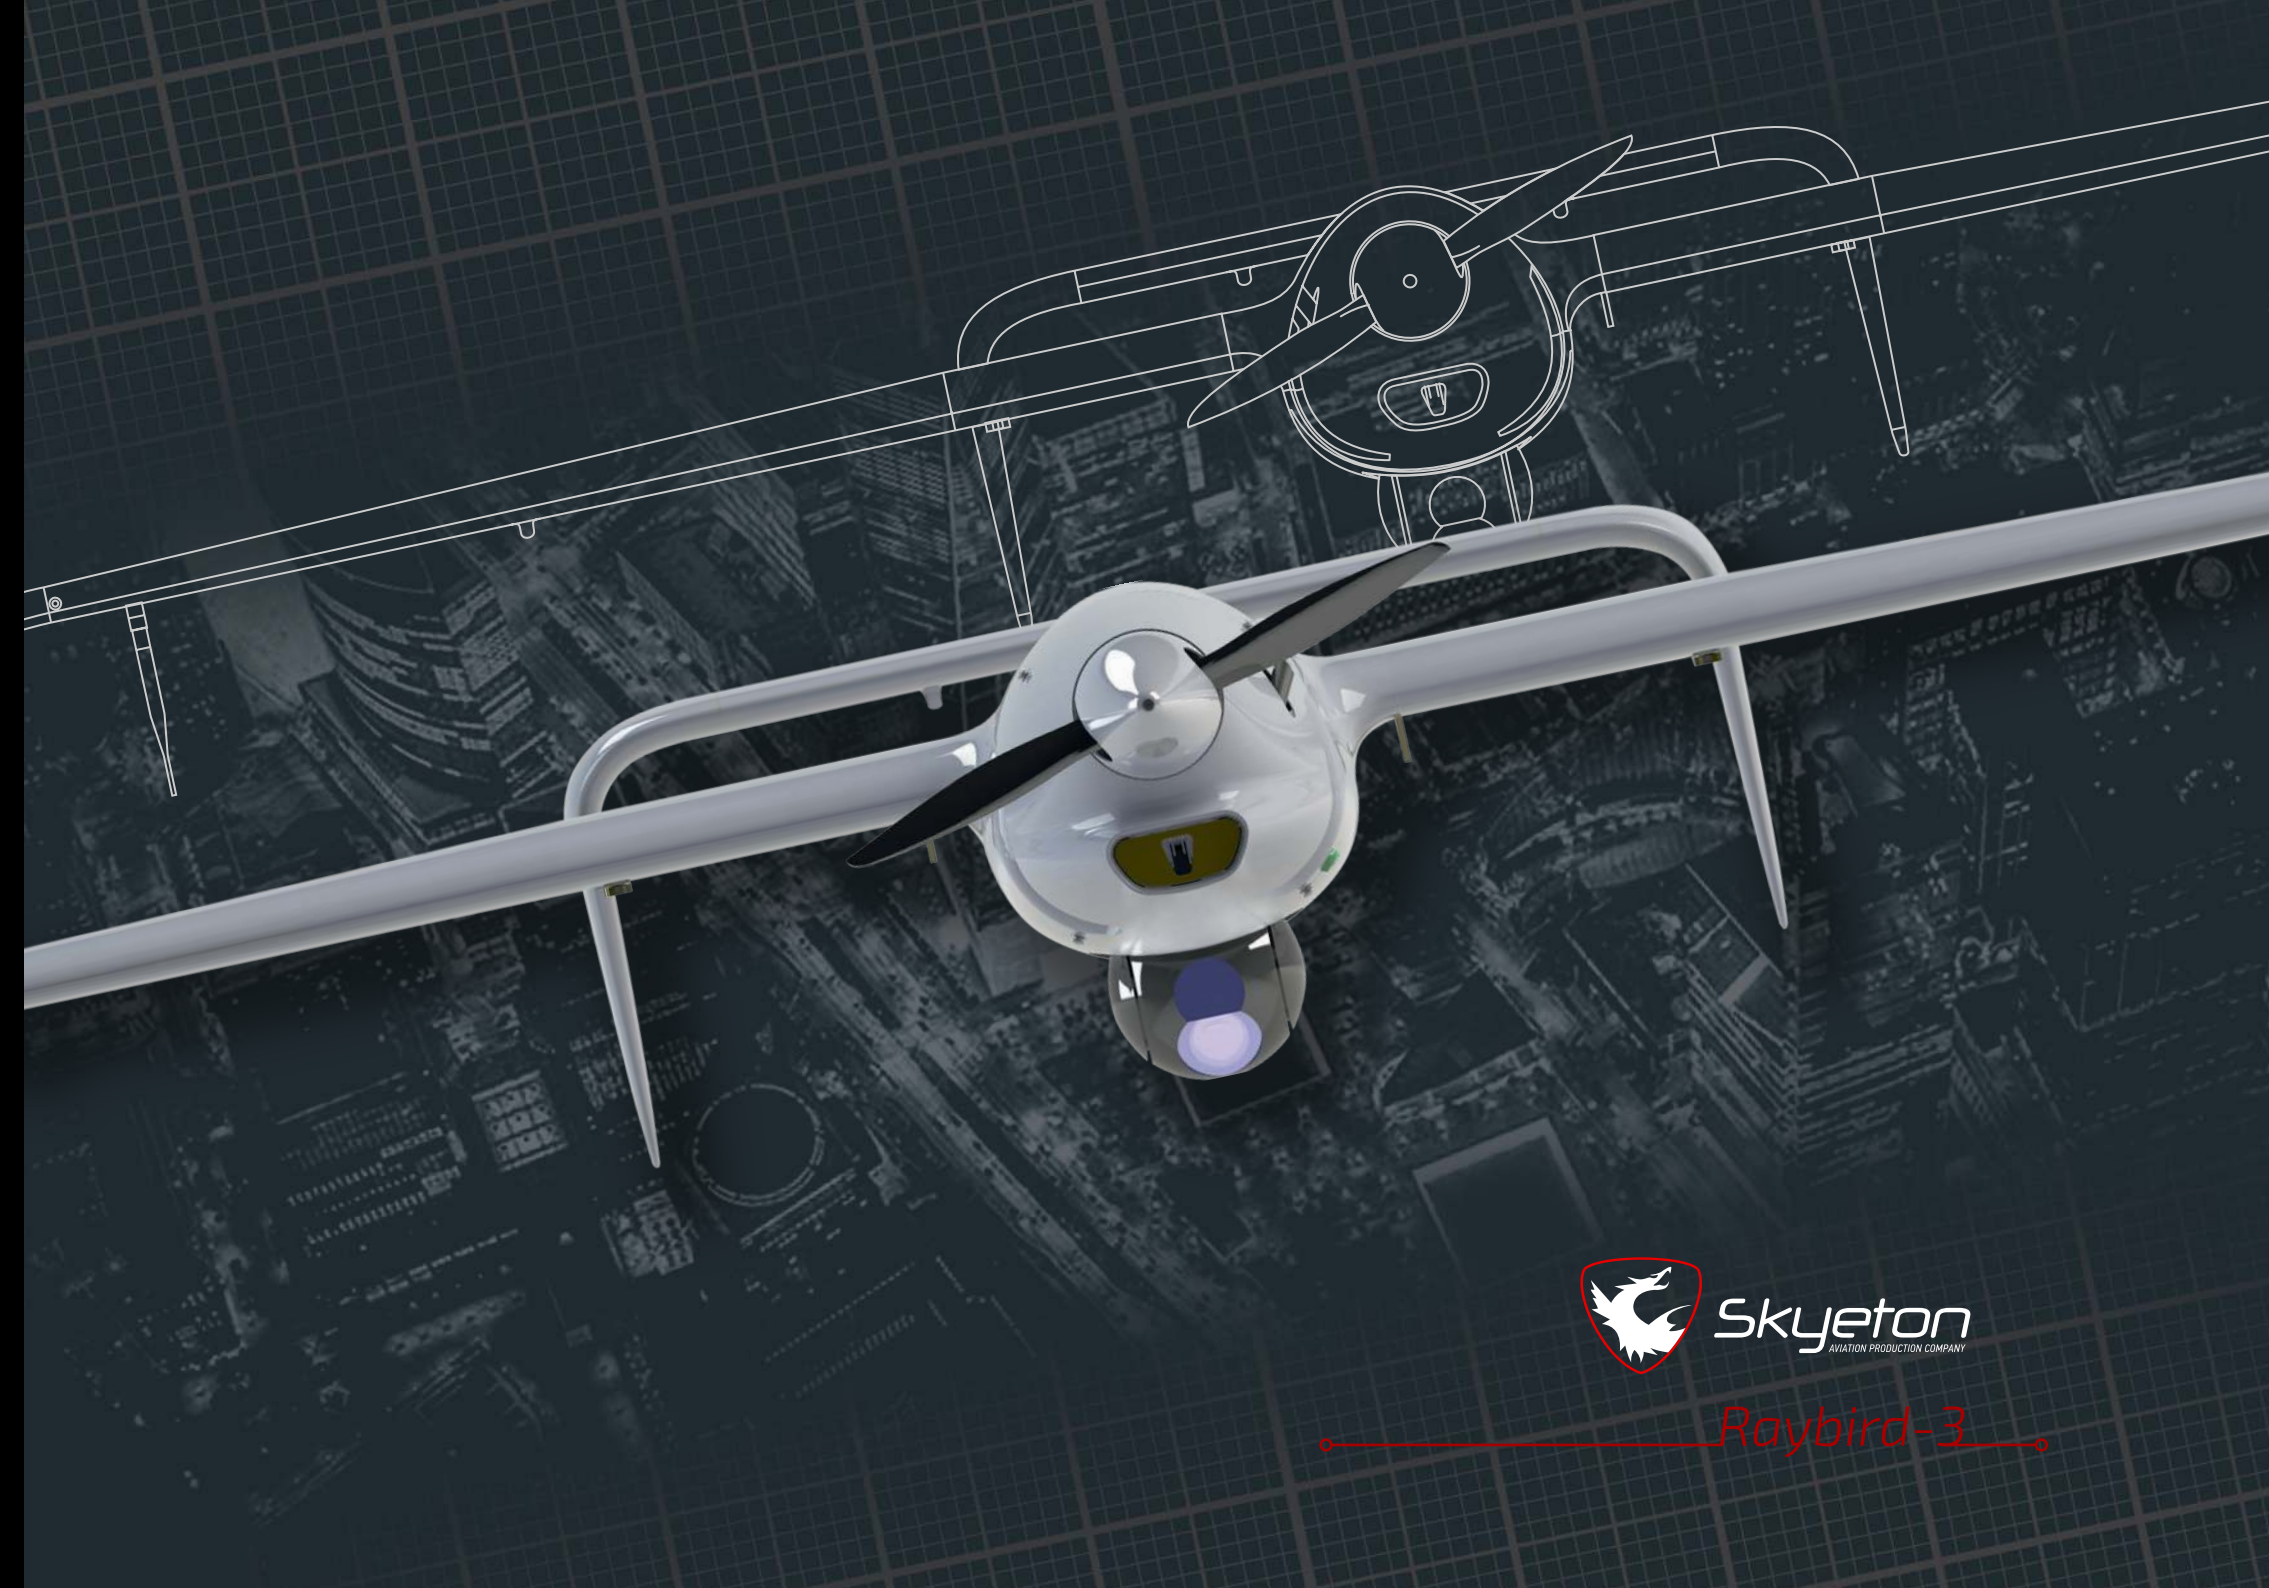

Raybird-3

Resilience

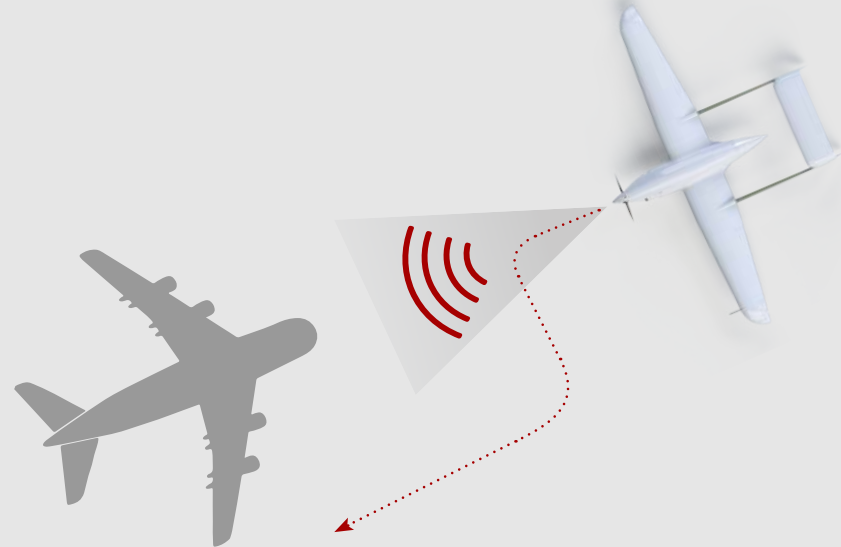


Safe and reliable

- Duplicated vital elements.
- Collision avoidance system.
- Encryption of telemetry and digital data links.
- Composite airframe .
- Tractor propeller.

Protected payload

- Gimbal retract mechanism.
- Parachute recovery.
- Flip-over landing.
- Optimised drag due to downward facing winglets.

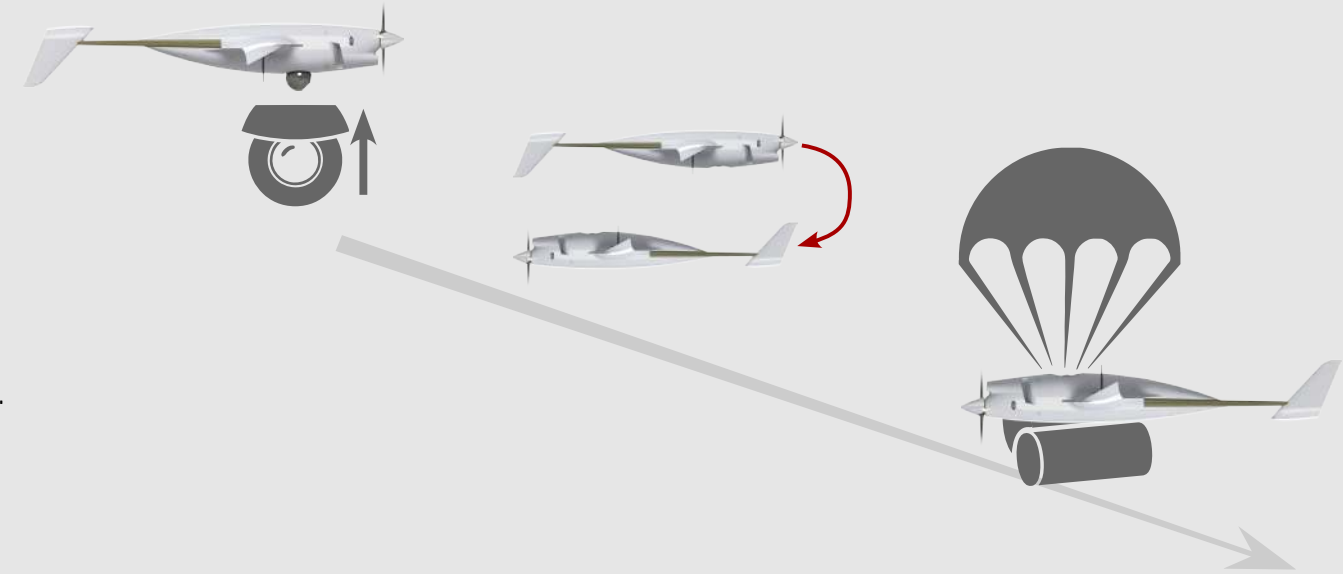

Autonomous system

- Reduction of human error occurence.
- Automatic take-off and landing.
- High accuracy Inertial Navigation System (INS).



Technical specifications

Wingspan.....	3 m
MTOW.....	20 kg
Payload.....	up to 5 kg
HD real-time video transmission.....	100+ km
Direct control mode.....	200+ km
Automatic flight mode.....	2000+ km

Cruise speed.....	120 km/h
Maximum speed.....	160 km/h
Operating ceiling.....	3000 m
Flight time.....	20+ h
Fuel.....	95 Octane, oil mix
Unpack to launch time.....	15 min

Resilience

Effectiveness

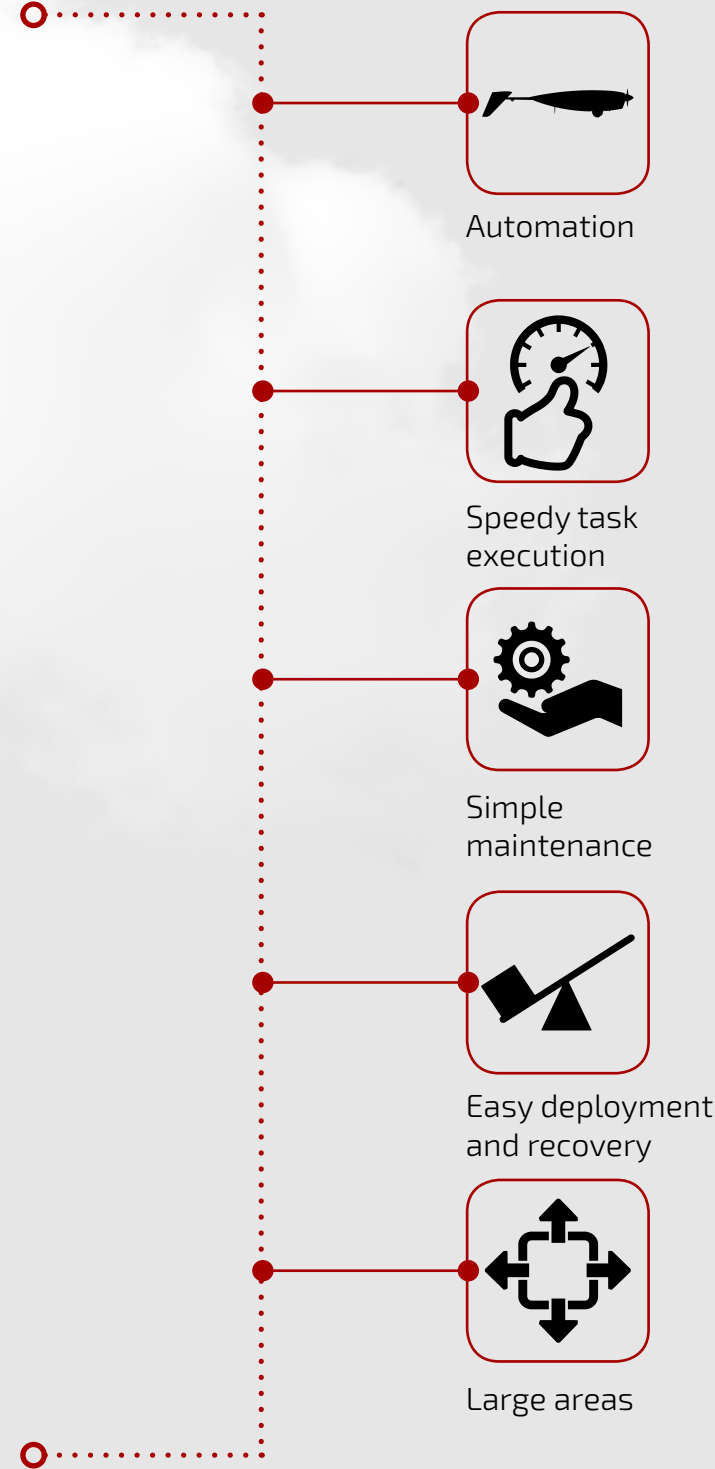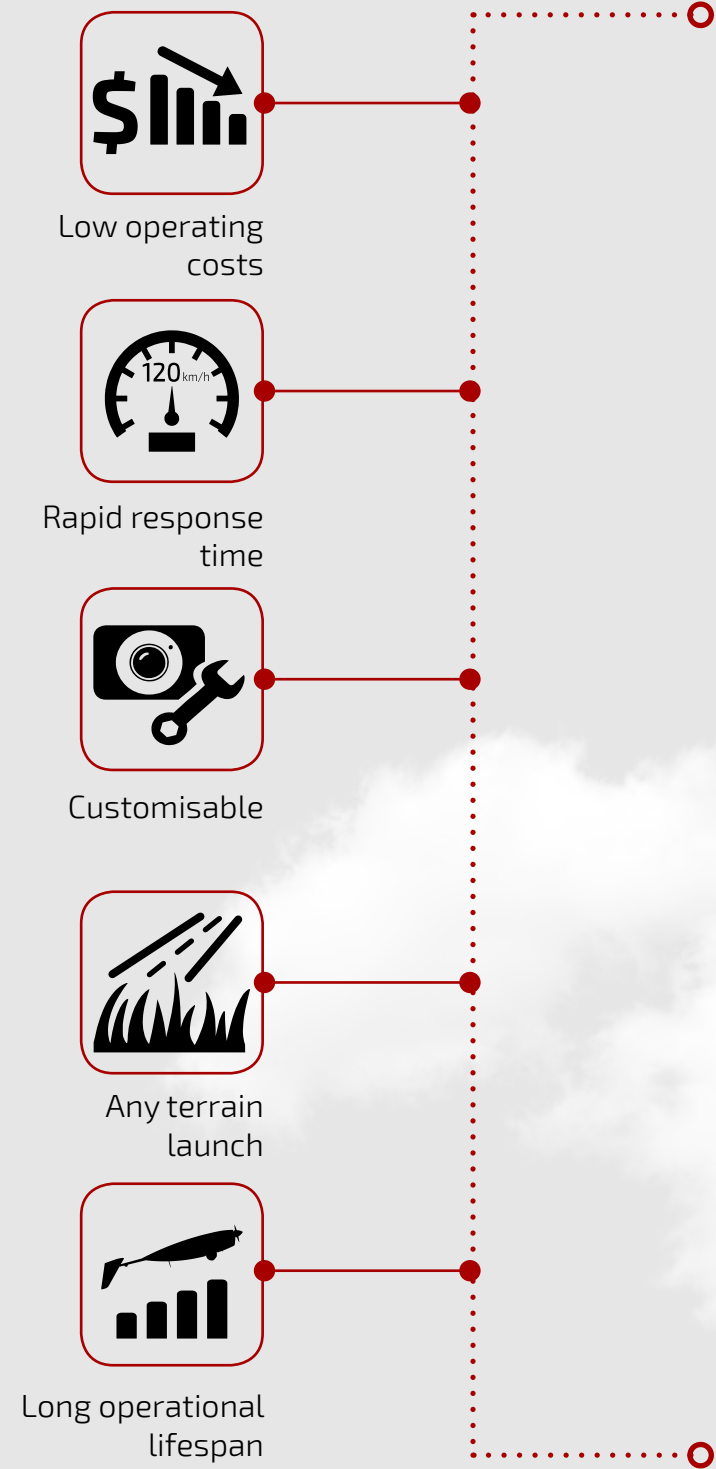

Effectiveness

Preventing wildfires

1

LARGE AREAS

ISTAR missions

2

LARGE AREAS

Search and rescue operations

3


Alderney

120 km

Saint-Malo



Aerial photo camera 2 3 4 5



Synthetic-aperture radar (SAR) 2




Multispectral camera 1 2 5



Gyro-stabilised multi-sensor gimbal 1 2 3 4 5

Improving border surveillance

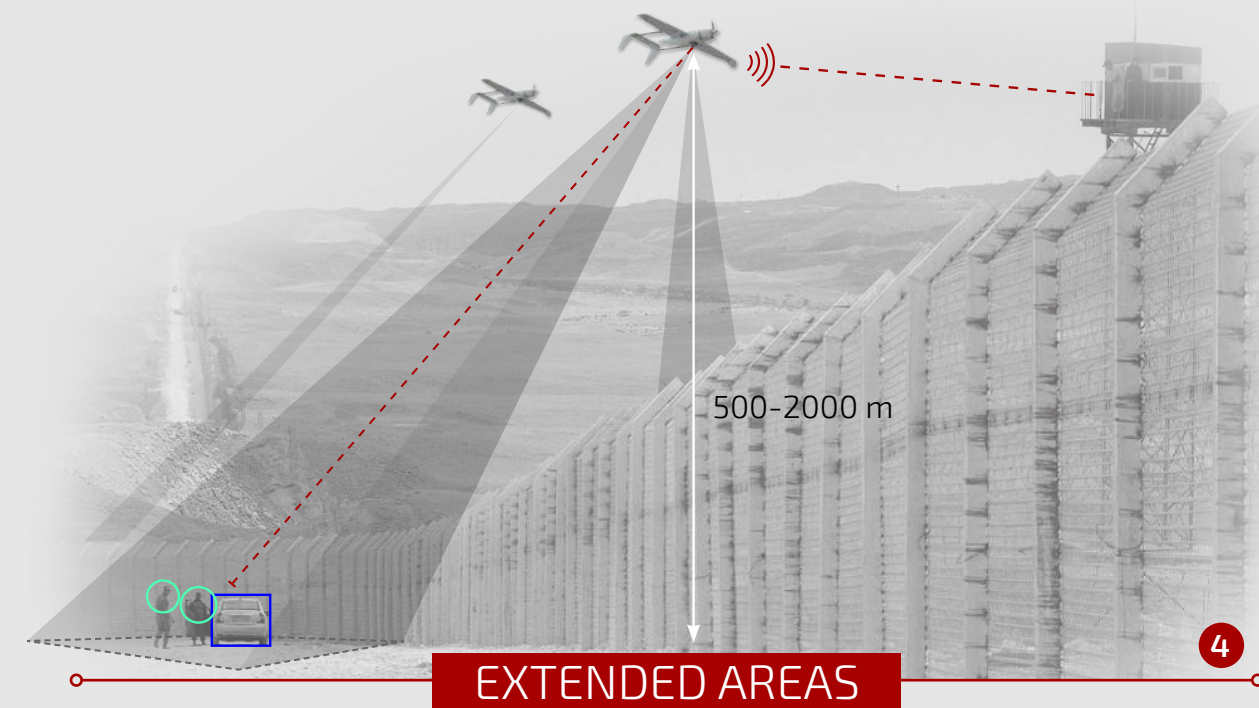

Pipelines monitoring

