


## PLANET 9523 OEM TC06 Board Technical Specifications

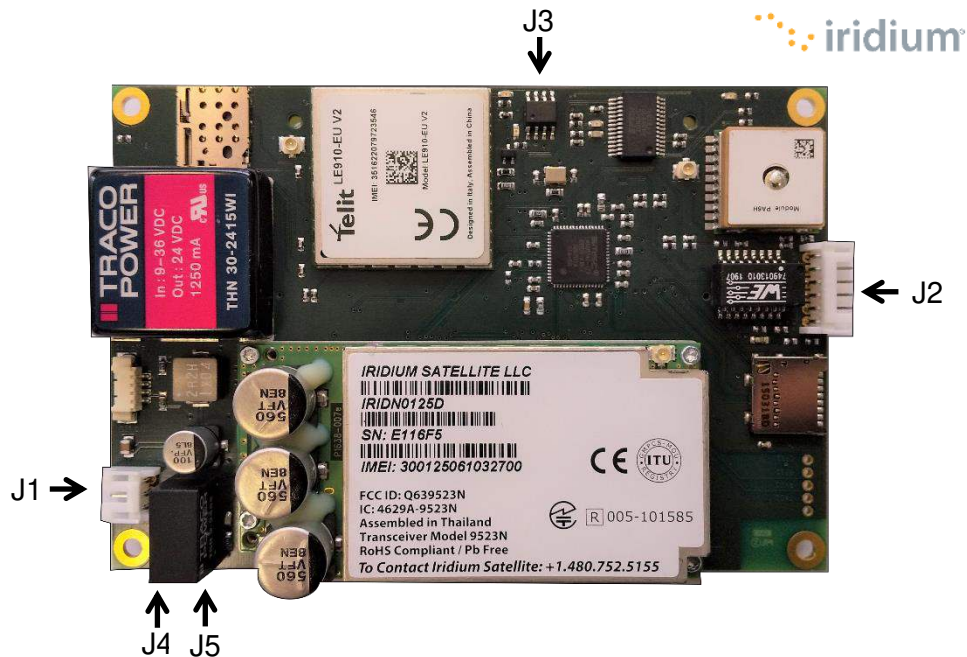

### Functional Description

PLANET 9523 OEM TC06 is a mobile Iridium Satellite and LTE connectivity board. It integrates a 9523N Iridium Modem and a Telit LTE Modem with their SIM card holders. The board is based on an ARM processor and includes an SD card providing up to 512Gb of data storage. A GPS receiver provides autonomous timing and location. The board supports Ethernet, USB and WIFI connectivity. The board is optionally fitted with an ADS-B receiver, an inertial sensor and environmental sensors (Pressure, Temperature, and Humidity).

### Application

The TC06 board is designed for use of Iridium and LTE data connectivity in embedded applications. Networking software enables IP connectivity with QoS management on Iridium and LTE infrastructure. The board provides data rates up to 50Mbps with LTE and 2.4kbps with Iridium. Several boards can also be bundled to increase throughput. The TC06 board is delivered with PLANET embedded application, and offers the possibility to host third party software.

#### Features

- Iridium Certified Product
- Operating Temperature: -25°C to +70°C

#### Mechanical Characteristics

- Dimensions: 112 x 76 mm
- Weight: 120g

#### Order Information

ATMOSPHERE Sarl (France)  
 14 Avenue de l'Europe  
 31520 Ramonville  
 Tel : (+33) 5 67 73 38 63

#### Power requirements

Power supply: 9.0 ⇒ 36VDC  
 Average Consumption: 700mA@12VDC  
 Peak Consumption: 2A@12VDC

ATMOSPHERE GmbH (Germany)  
 Argelsrieder Feld 22  
 82234 Wessling  
 Tel: (+49) 8153 88678-255

Mail: sales@atmosphere.aero

**J1 – Power Connector**

Connector: JST, S3B-PH, 3-way  
Mating Socket: JST, PHR-3, 3-way

Pin No.	Signal Name	Signal Function
1	V+	10.5 – 30V
2	GND	Ground
3	0V	Shield

**J2 – Ethernet Connector**

Connector: JST, S6B-PH, 6-way  
Mating Socket: JST, PHR-6, 6-way

Pin No.	Signal Name	Signal Function
1	RX+	Receive Data +
2	NC	NC
3	RX-	Receive Data -
4	TX+	Transmit Data +
5	NC	NC
6	TX-	Transmit Data -

**J3 – USB Connector**

Connector: JST, S4B-PH, 4-way  
Mating Socket: JST, PHR-4, 4-way

Pin No.	Signal Name	Signal Function
1	+5V	+5V (USB)
2	D-	Data – (USB)
3	D+	Data + (USB)
4	GND	Ground (USB)

**J4 – Power Led Connector**

Connector: JST, B2B-PH, 2-way  
Mating Socket: JST, PHR-2, 2-way

Pin No.	Signal Name	Signal Function
1	GND	Ground
2	+3V3	Power Led

**J5 – Status Output Connector**

Connector: JST, B2B-PH, 2-way  
Mating Socket: JST, PHR-2, 2-way

Pin No.	Signal Name	Signal Function
1	GND	Ground
2	GPIO13 +3V3	Internal Status Signal